


Screw clamping terminal block-  
UKJ-1.5MT/2-2- 011046





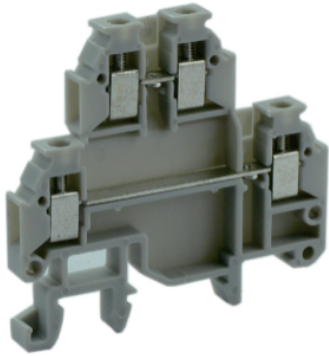


Screw clamping terminal block , rated voltage:400V , Max. operating current:17.5A, connection method : screw connection , number of connections : 4 , crimping range : 0.14mm<sup>2</sup> -1.5mm<sup>2</sup> , thickness:4.2mm , height:40mm , color : grey , mounting type : TH35-7.5、 TH15-5.5

Product parameter

Parameter	Data
Packing unit (PCS)	160
NW per piece(g)	0.86
Layers	1
Number of connections	4
Rated cross section(mm <sup>2</sup> )	1.5
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	400
Rated current(A)	17.5
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M2
Stripping length(mm)	6
Tightening torque	0.22-0.25
Solid conductors(mm <sup>2</sup> )	0.14-1.5
Stranded conductors(mm <sup>2</sup> )	0.14-1.5
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	44.4
Thickness(mm)	4.2
Height(mm)	40