


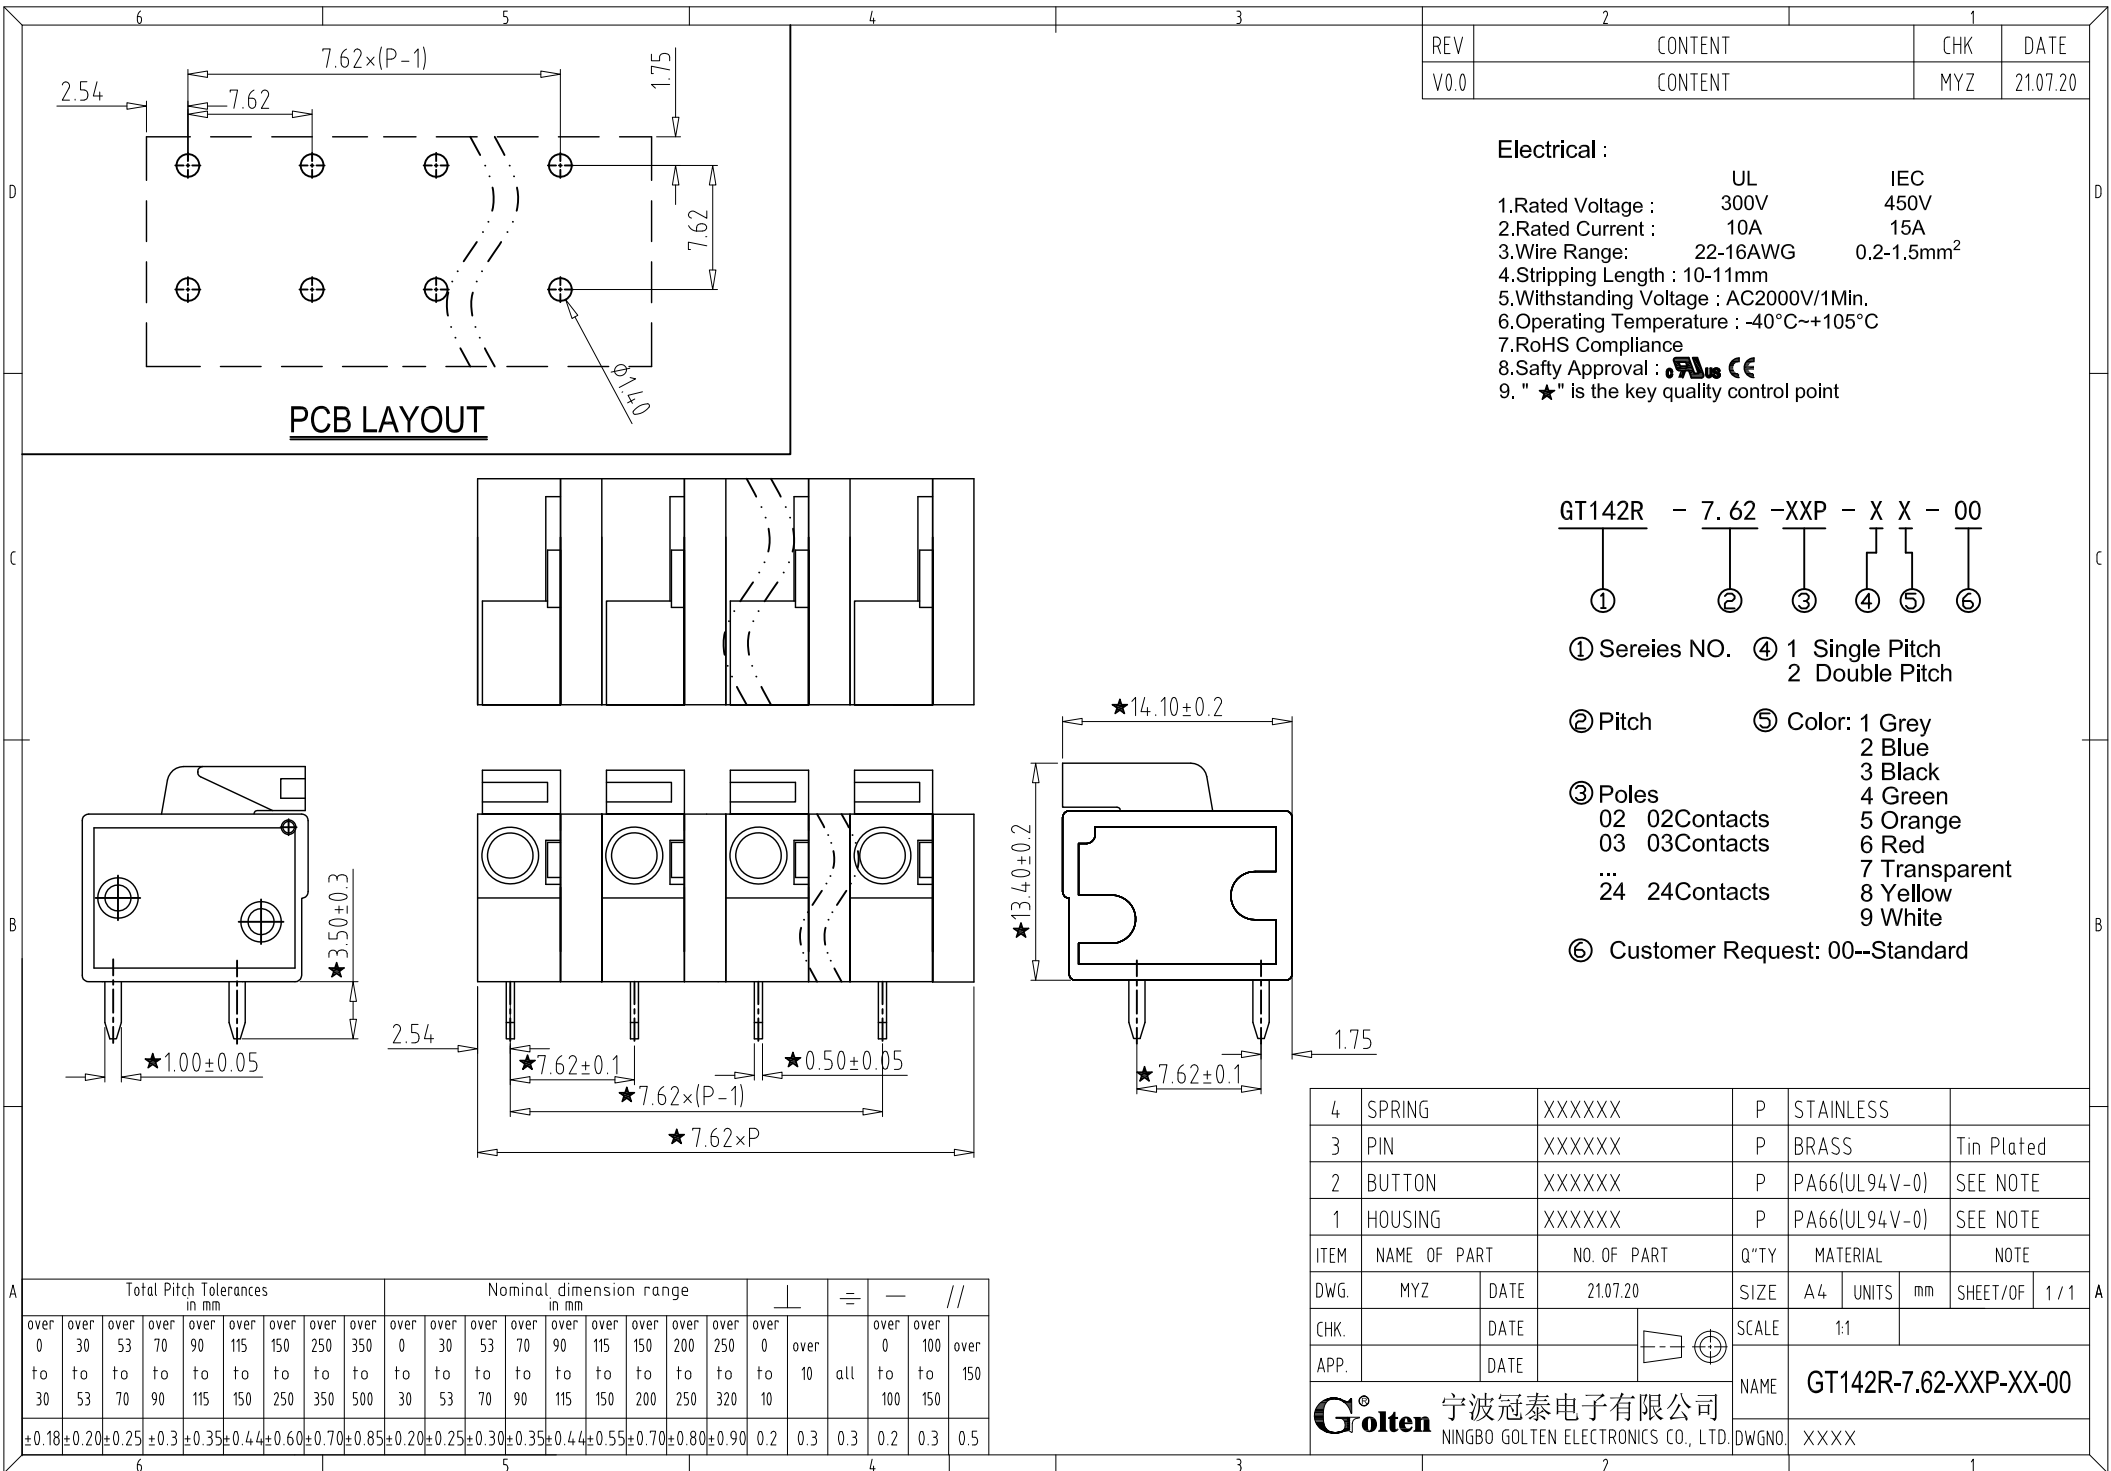


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.07.20

Electrical :

	UL	IEC
1.Rated Voltage :	300V	450V
2.Rated Current :	10A	15A
3.Wire Range:	22-16AWG	0.2-1.5mm ²
4.Stripping Length :	10-11mm	
5.Withstanding Voltage :	AC2000V/1Min.	
6.Operating Temperature :	-40°C~+105°C	
7.RoHS Compliance		
8.Safety Approval :	CE	
9. " ★ " is the key quality control point		

GT142R - 7.62 -XXP - X X - 00



① Series NO. ④ 1 Single Pitch
2 Double Pitch

② Pitch ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00--Standard

4	SPRING	XXXXXX	P	STAINLESS	
3	PIN	XXXXXX	P	BRASS	Tin Plated
2	BUTTON	XXXXXX	P	PA66(UL94V-0)	SEE NOTE
1	HOUSING	XXXXXX	P	PA66(UL94V-0)	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.07.20	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GT142R-7.62-XXP-XX-00
				DWGNO.	XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm										$\perp$		$\equiv$	$-$		$//$
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	over 0	over 10	all	over 0	over 100	over 150
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500		to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10				to 100	to 150	to 150
± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85		± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5	