


Spring-cage connection terminal block- UJ5-6/1 × 2 - 421030

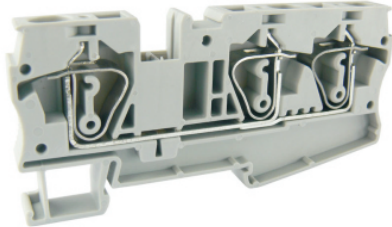

Spring-cage connection terminal block , rated voltage:800V, Max. operating current:52A, connection method:spring-cage connection, number of connection : 3 , crimping range : 0.5 mm² -10mm² , AWG : 24-8 , thickness:8.2mm , height:42.2mm , color : grey , mounting type : TH35-7.5、TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	40
NW per piece(g)	22.7
Layers	1
Number of connections	3
Rated cross section(mm ²)	10
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	800
Rated current(A)	52
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	CCS
Certification logo	IECE_x
Certification logo	cUL[®] US
Certification logo	
Certification logo	
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	12
Solid conductors(mm ²)	0.5-10
Solid conductors AWG	20-8
Stranded conductors(mm ²)	0.5-6
Stranded conductors AWG	20-8

Parameter	Data
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	90.5
Thickness(mm)	8.2
Height(mm)	42.2