
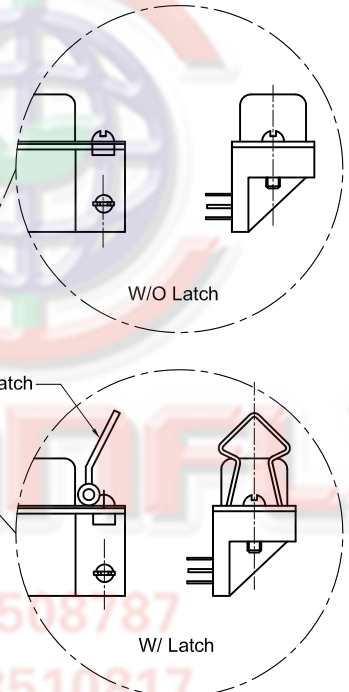
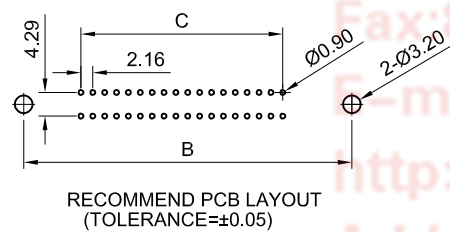
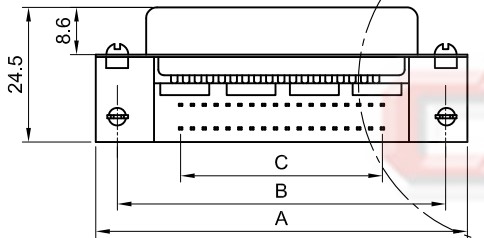


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	HP 17/06/05'		LJC 17/06/05'
B	DRAWING UPDATE	JLZ 07/11/19'		

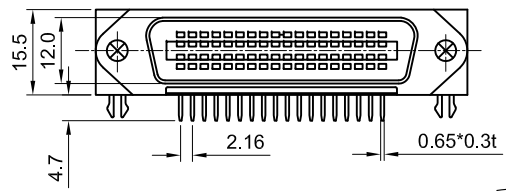

NOTES:

- MATERIALS**
 - Insulator: PBT+30% Glass Fiber(UL 94V 0)
 - Contact: Copper alloy
 - Shell: Steel
 - Latch: Stainless steel
- SPECIFICATION**
 - Current Rating: 1A
 - Operating Voltage: 250V
 - Dielectric withstanding voltage: 500V For 1 minute
 - Insulator Resistance: 1000MΩ min
 - Temperature Range: -40°C ~ +105°C
- FEATURES**
 - Low cost,high density PCB mounted connector will mate to other ribbon type connectors
 - One piece connector design reduce installation time up to 2/3 for lowest installed cost benefits

4. PRODUCT NUMBER CODE:

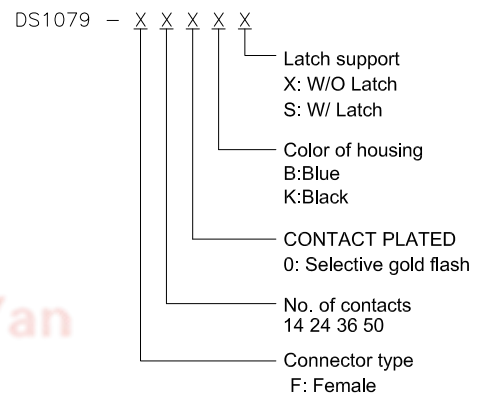

Shell Size	A	B	C
14pin	43.7	35.99	12.96
24pin	54.5	46.79	23.76
36pin	67.7	59.7	36.72
50pin	82.8	74.9	51.84

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 2
DRAWING NO.	C-DS1079-FXXXX-B		

PROJECTION		TITLE	Centronic Connector Female
UNITS	mm		R/A Type
SHEET SIZE	A4	SERIES	DS1079 SERIES




晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of the information herein, in any format or manner, CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 07/11/19'		

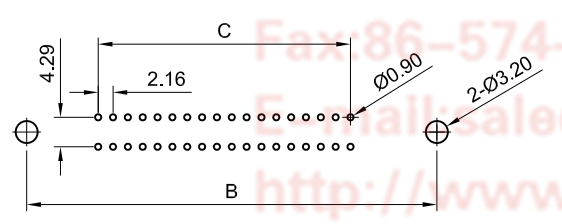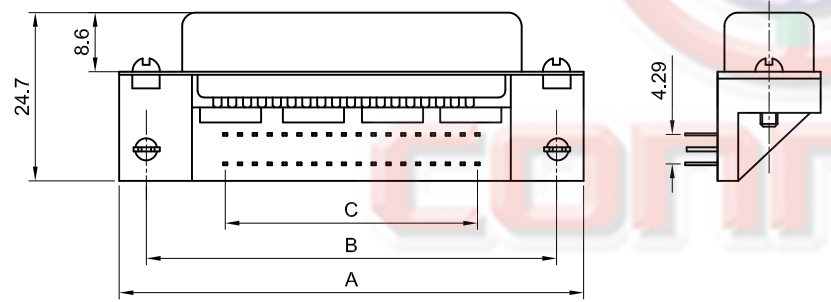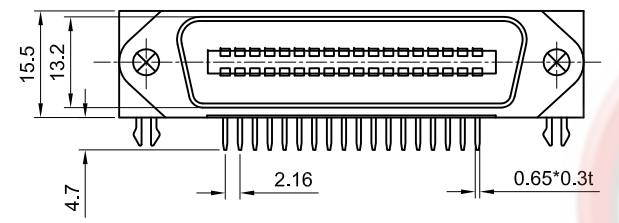


RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

Shell Size	A	B	C
14pin	43.7	35.99	12.96
24pin	54.5	46.79	23.76
36pin	67.7	59.7	36.72
50pin	82.8	74.9	51.84

NOTES:

- MATERIALS**
 - Insulator: PBT+30% Glass Fiber(UL 94V 0)
 - Contact: Copper alloy
 - Shell: Steel
 - Latch: Stainless steel
- SPECIFICATION**
 - Current Rating: 1A
 - Operating Voltage: 250V
 - Dielectric withstanding voltage: 500V For 1 minute
 - Insulator Resistance: 1000MΩ min
 - Temperature Range: -40°C ~ +105°C
- FEATURES**
 - Low cost,high density PCB mounted connector will mate to other ribbon type connectors
 - One piece connector design reduce installation time up to 2/3 for lowest installed cost benefits

4. PRODUCT NUMBER CODE:

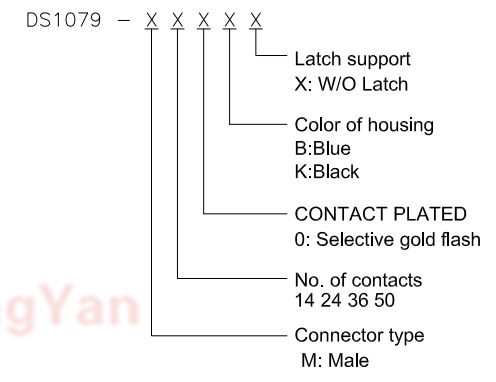

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	2 OF 2
DRAWING NO.	C-DS1079-MXXXX-A		

PROJECTION		TITLE	Centronic Connector Male
UNITS	mm		R/A Type
SHEET SIZE	A4	SERIES	DS1079 SERIES

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8