

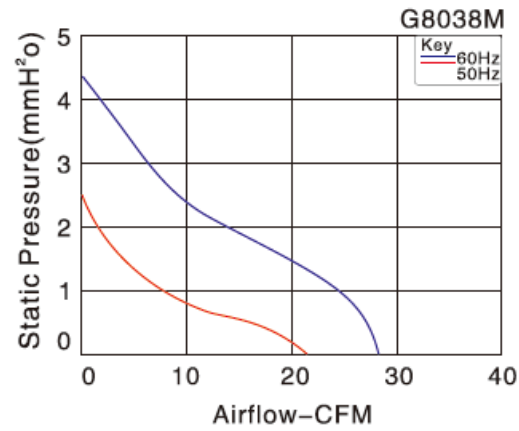


尺寸 Size: 80mmx80mmx38mm  
 风量 Airflow: 37-48m<sup>3</sup>/hr  
 22-28CFM  
 重量 Weight: 275g  
 噪音 Noise: 26-32dBA  
 风叶 Impeller Material: PBT Thermoplastic Black, UL94-VO  
 外框 Frame: Aluminum Alloy  
 端子 Terminals: 0.5mm  
 引线 Lead Wire: AWG#22 UL 1569(Optional)  
 马达 Motor: Shaded Pole Induction Motor  
 温度范围 Operating Temperature: -10°C~+65°C

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G8038HA <sub>1</sub> S	Sleeve	100/125	50/60	0.2	9.5/7	2550/3100	28/32	39/48	23/28	1	/
G8038HA <sub>2</sub> S		200/240	50/60	0.06/0.05	9.5/7	2550/3100	28/32	39/48	23/28	1	/
G8038HA <sub>1</sub> B	Ball	100/125	50/60	0.2	9.5/7	2550/3100	28/32	39/48	23/28	1	/
G8038HA <sub>2</sub> B		200/240	50/60	0.06/0.05	9.5/7	2550/3100	28/32	39/48	23/28	1	/
G8038MA <sub>1</sub> S	Sleeve	100/125	50/60	0.13	9/7	2300/2700	26/30	37/44	22/26	1	/
G8038MA <sub>2</sub> S		200/240	50/60	0.065	7/6	2300/2700	26/30	37/44	22/26	1	/
G8038MA <sub>1</sub> B	Ball	100/125	50/60	0.13	9/7	2300/2700	26/30	37/44	22/26	1	/
G8038MA <sub>2</sub> B		200/240	50/60	0.065	7/6	2300/2700	26/30	37/44	22/26	1	/

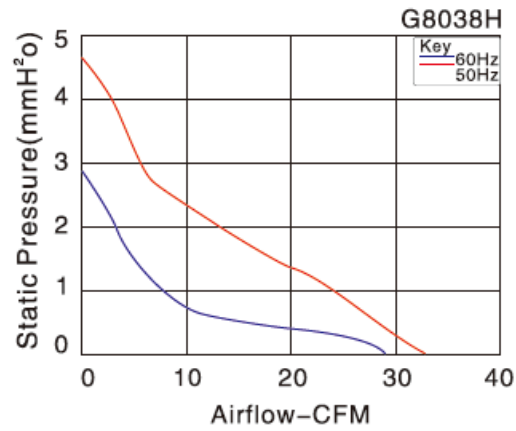

### Fan Accessories

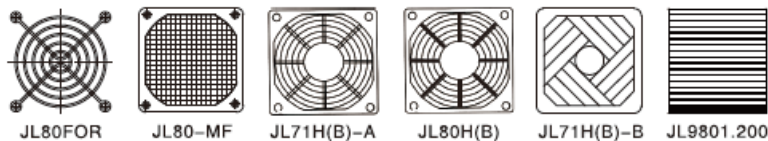

JIULONG MOTOR  
AC DC FANS COOLING FANS



UL  
E248719



2

Http://www.xtgygs.cn  
 如需特殊电压也可根据需要提供，本公司保留对产品规格进行修改的权利，恕不另行通知。  
 Special voltage may be provided if necessary according to the requirements, all technical modification rights reserved.