




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

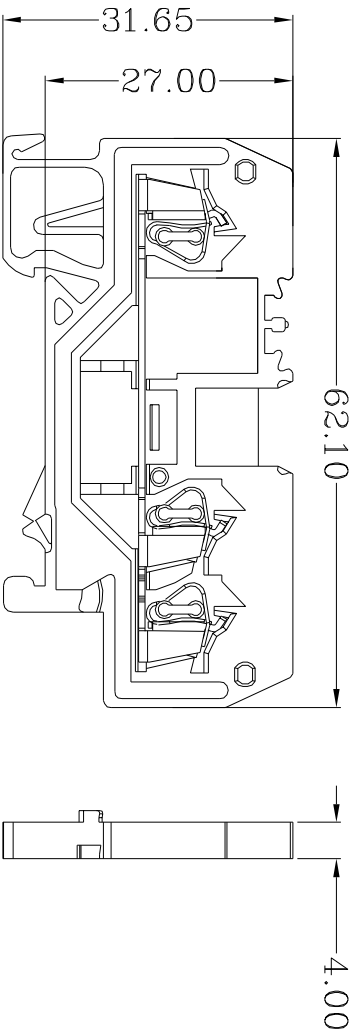

IEC 额定数据/IEC Rated data

接线范围/Wire range	0.2-1.5mm ²
单股导线/Solid	0.2-1.5mm ²
软导线/Stranded	0.2-1.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.0mm ²

带预绝缘端头软导线/Stranded with ferrules with plastic sleeve 0.2-1.0mm²

剥线长度/Strip length 8-9mm

额定电压/Rated voltage 800V

额定电流/Rated current 18A

额定脉冲耐受电压/Rated surge voltage 8KV

污染等级/Pollution degree 3

过电压类别/Surge voltage category III

UL 额定数据/UL Rated data

B	C	D
---	---	---

10A	10A	
-----	-----	--

600V	600V	
------	------	--

接线范围/Wire range 24-16AWG

其他信息/Other information

塑件/Housing PA66

触点材料/Contact 铜合金/Copper alloy

镀层/Coating 锡/Tin

阻燃等级/Flame retardant rating V0

使用环境温度/Usage ambient temperature -25℃ - +70℃

储存及运输环境温度/Storage ambient temperature -40℃ - +85℃

导轨尺寸/rails Size SP35X7.5/SP35X15

认证/Approval



订货信息 Order Info

订货号 ORDER NUMBER	颜色 COLOR
215951	灰色/Gray
215952	橙色/Orange
215953	红色/Red
215954	蓝色/Blue
215955	黄色/Yellow

未标注公差参照GB/T14886

标注尺寸 公差	0-3 ±0.08	>3-6 ±0.09	>6-10 ±0.10	>10-14 ±0.12	>14-18 ±0.14	>18-24 ±0.16	>24-30 ±0.18	>30-40 ±0.21	>40-50 ±0.24	>50-65 ±0.28	>65-80 ±0.32	>80-100 ±0.36	>100-120 ±0.41	>120-140 ±0.46
------------	--------------	---------------	----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	-----------------	------------------	-------------------	-------------------

	Rev. 01	Name
单位/Unit	mm	21595X 3通道正面接线端子 21595X 3conductor through terminal blocks of front-entry