

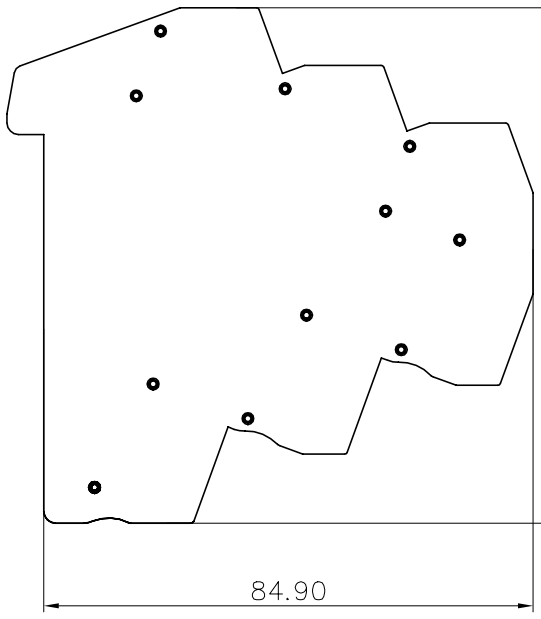


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

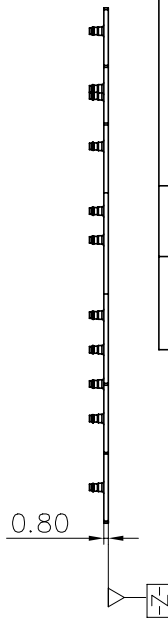

- Connection method:
1. For Solid wire, peel wire in right length, push down the wire.
 2. For flexible wire, peeling wire in right length, pushdown the key & fix the wire, or wire furred and fix then.

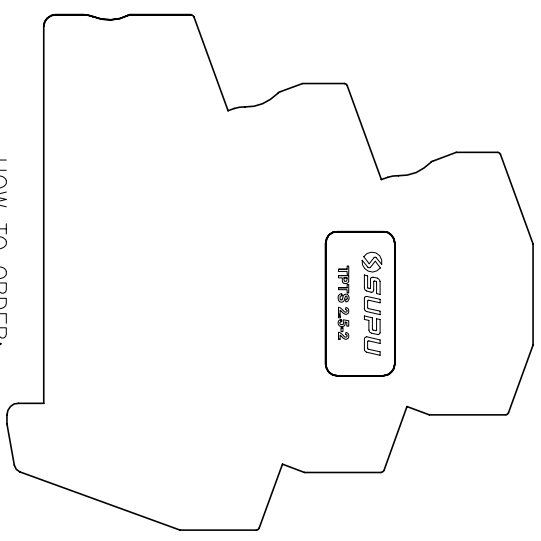

HOW TO ORDER:
 TP18 2.5-2-XX-EC
 Series No. Color: Series No.
 GY: Grey
 OG: Orange

Material: Insulator PA66 UL94 V-0

- General information:
1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Operating temperature: -40°C~+105°C
 3. RoHS Compliance
 4. Undimensioned Tolerances:

Pitch	Range	In	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
Over	6	10	10	24	30	60	100	150	150	150	150	150	±2°
To	10	10	10	30	50	100	150	150	150	150	150	±2°	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.00	±1.30	±1.30	±1.30	±1.30	±2°	

Order No.	TP18 2.5-2-XX-EC	Item	Signature	Date	名称	TP系列-正面接线 四层 0.8mm ² 盖板	未注公差 Tolerance	表面 Surface
		设计	陈武	2/25/21"	图号	PRM002524	见公差表	VDI21
		审核	陈武	3/16/21"	材料	见NOTES	版本号	
		工艺	-	-	物料号	411521017	Revision Number	重量 Weight
		标准化	-	-		411521018	M1	比例 Scale
		批准	梁文龙	3/16/21"			第1页/共1页 1 of 1	1:1
								mm

原图号 Old Draw No.
 底图总号 Assembly No.
 借用件登记 Common Part
 普通零件登记

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.
 未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

1 2 3 4 5 6 7 8