


3W Isolated DC-DC converter in DIP package
Wide input and regulated dual/single output

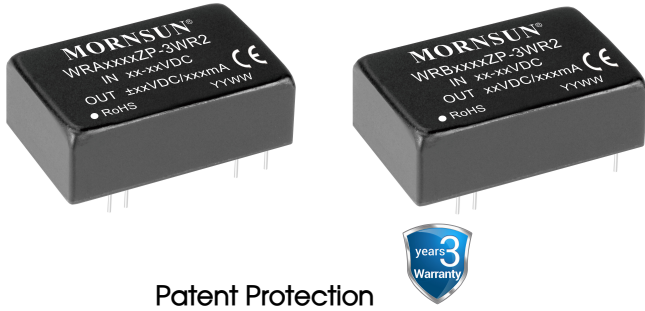

Patent Protection

CE Report RoHS
EN62368-1

FEATURES

- Wide input voltage range (2:1)
- High efficiency up to 86%
- I/O isolation test voltage 1.5k VDC
- Output short-circuit protection(self-recovery)
- Operating ambient temperature range: -40°C to +85°C
- Meet CISPR32/EN55032 CLASS A, without extra components
- Meet EN62368 standards

WRA_ZP-3WR2 & WRB_ZP-3WR2 series of isolated 3W DC-DC converter products with 2:1 input voltage and conventional voltage output. The product has a relatively compact DIP package, and features high efficiency, operating temperature of -40°C to +85°C, remote control, and continuous short-circuit protection. The smaller size and cost-effective design make the converter an ideal solution in communication, instruments, and industrial electronics applications.

Selection Guide

Certification	Part No.	Input Voltage (VDC)		Output		Full Load Efficiency (%)Min./Typ.	Capacitive Load ² (μF)Max.		
		Nominal (Range)	Max. ¹	Voltage (VDC)	Current (mA) Max./Min.				
EN	WRA0505ZP-3WR2	5 (4.5-9)	11	±5	±300/±15	74/76	2200		
	WRA0509ZP-3WR2			±9	±166/±8	74/76	1800		
	WRA0512ZP-3WR2			±12	±125/±6	76/78	1800		
	WRA0515ZP-3WR2			±15	±100/±5	76/78	1000		
	WRB0505ZP-3WR2			5	600/30	72/74	4700		
	WRB0512ZP-3WR2			12	250/12	75/77	2700		
	WRB0515ZP-3WR2			15	200/10	75/77	2200		
	WRA1205ZP-3WR2			12 (9-18)	20	±5	±300/±15	79/81	2200
	WRA1209ZP-3WR2					±9	±166/±8	82/84	2000
	WRA1212ZP-3WR2					±12	±125/±6	82/84	1800
WRA1215ZP-3WR2	±15	±100/±5	83/85			1000			
WRB1203ZP-3WR2	3.3	909/46	72/74			4700			
WRB1205ZP-3WR2	5	600/30	79/81			4700			
WRB1212ZP-3WR2	12	250/12	81/83			2700			
WRB1215ZP-3WR2	15	200/10	80/82			2200			
WRB1224ZP-3WR2	24	125/6	81/83			1800			
EN	WRA2405ZP-3WR2	24 (18-36)	40			±5	±300/±15	80/82	2200
EN	WRA2412ZP-3WR2			±12	±125/±6	82/84	1800		
EN	WRA2415ZP-3WR2			±15	±100/±5	82/84	1000		
EN	WRB2403ZP-3WR2			3.3	909/46	76/78	4700		
EN	WRB2405ZP-3WR2			5	600/30	79/81	4700		
--	WRB2409ZP-3WR2			9	333/16	79/81	2700		
EN	WRB2412ZP-3WR2			12	250/12	84/86	2700		
--	WRB2415ZP-3WR2			15	200/10	84/86	2200		
EN	WRB2424ZP-3WR2			24	125/6	83/85	1800		
EN	WRA4805ZP-3WR2			48 (36-75)	80	±5	±300/±15	80/82	2200
EN	WRA4812ZP-3WR2	±12	±125/±6			82/84	1800		
EN	WRA4815ZP-3WR2	±15	±100/±5			83/85	1000		
EN	WRA4824ZP-3WR2	±24	±63/±3			82/84	680		
EN	WRB4803ZP-3WR2	3.3	909/46			74/76	4700		
EN	WRB4805ZP-3WR2	5	600/30			79/81	4700		

--	WRB4805ZP-3WR2	48 (36-75)	80	5	600/30	80/82	4700
	WRB4812ZP-3WR2			12	250/12	84/86	2700
EN	WRB4815ZP-3WR2			15	200/10	84/86	2200
	WRB4824ZP-3WR2			24	125/6	82/84	1000

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage;
- ② The specified maximum capacitive load for positive and negative output is identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load /no-load)	5VDC input	--	789/40	834/45	mA
	12VDC input	--	316/30	347/35	
	24VDC input	--	152/15	165/20	
	48VDC input	--	77/5	85/10	
Reflected Ripple Current	5VDC input	--	20	--	mA
	12VDC input	--	30	--	
	24VDC input	--	30	--	
	48VDC input	--	30	--	
Surge Voltage (1sec. max.)	5VDC input	-0.7	--	12	VDC
	12VDC input	-0.7	--	25	
	24VDC input	-0.7	--	50	
	48VDC input	-0.7	--	100	
Start-up Voltage	5VDC input	--	--	4.5	VDC
	12VDC input	--	--	9	
	24VDC input	--	--	18	
	48VDC input	--	--	36	
Input Filter		Pi filter			
Hot Plug		Unavailable			

Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Voltage Accuracy	5%-100% load	--	±1	±3	%	
No-load Output Voltage Accuracy	Input voltage range	--	±1.5	±5		
Balance Of Output Voltage	Dual output, balanced load	--	±0.5	±1		
Linear Regulation	Input voltage variation from low to high at full load	--	±0.2	±0.5		
Load Regulation	5%-100% load	--	±0.2	±0.5		
Transient Recovery Time	25% load step change	--	0.5	2	ms	
Transient Response Deviation		--	±2	±5	%	
Temperature Coefficient	Full load	--	±0.02	±0.03	%/°C	
Ripple & Noise*	20MHz bandwidth, nominal input voltage	24VDC output	--	100	120	mVp-p
		Others	--	50	80	
Short-circuit Protection	Input voltage range	Continuous, self-recovery				

Note: * The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	120	--	pF

Operating Temperature	Derating when operating temperature up to 85°C (see Fig. 1)	-40	--	85	°C
Storage Temperature		-55	--	125	
Case Temperature Rise	Ta=25°C	--	25	--	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	300	
Storage Humidity	Non-condensing	--	--	95	%RH
Switching Frequency(PFM mode)	100% load, nominal input voltage	--	200	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours




Mechanical Specifications



Case Material	Aluminum alloy
Dimension	32.00 x 20.00 x 10.80 mm
Weight	14 g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032	CLASS A(Bare component) CLASS B (see Fig.3-② for recommended circuit)
	RE	CISPR32/EN55032	CLASS A(Bare component) CLASS B (see Fig.3-② for recommended circuit)
EMS	ESD	IEC/EN61000-4-2	Contact ±4kV perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m perf. Criteria A
	EFT	IEC/EN61000-4-4	±2kV (see Fig.3-① for recommended circuit) perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2kV (see Fig.3-① for recommended circuit) perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-29	0%, 70% perf. Criteria B

Typical Characteristic Curves

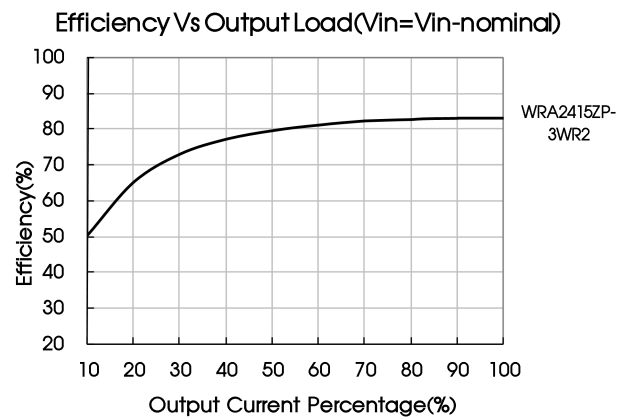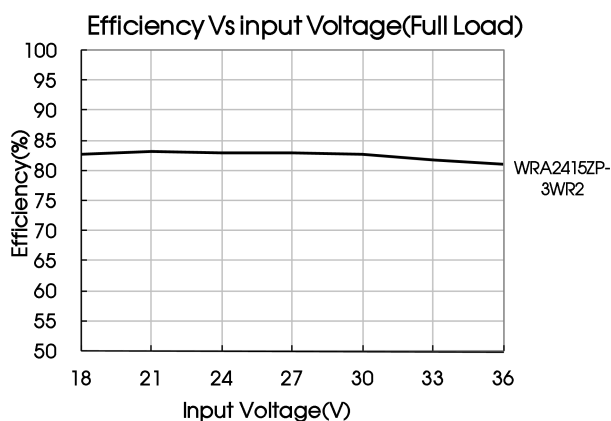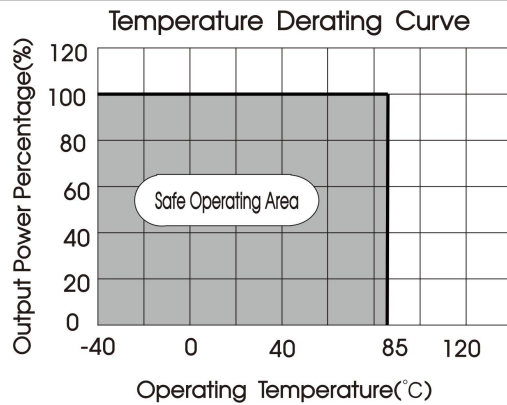

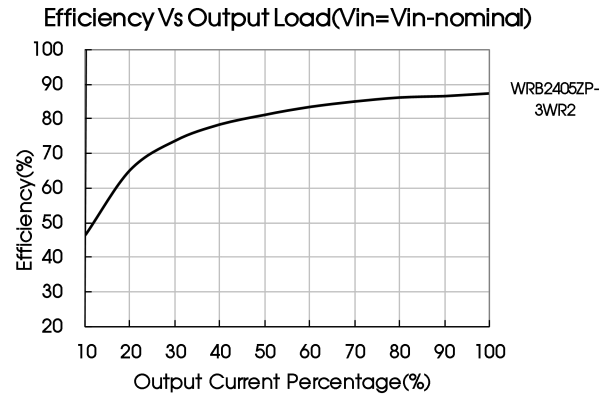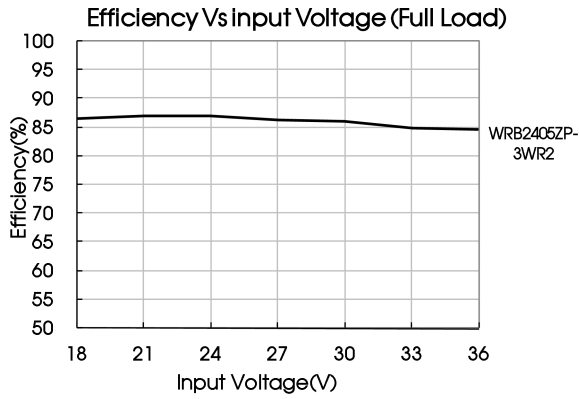

Design Reference

1. Output load requirements

In order to ensure the converter can work reliably with high efficiency, the minimum load should not less than 5% rated load when it is used. If the needed power is indeed small, please parallel a resistor on the output side (The sum of the efficient power and resistor consumption power is not less than 5%).

2. Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values C_{in} and C_{out} and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

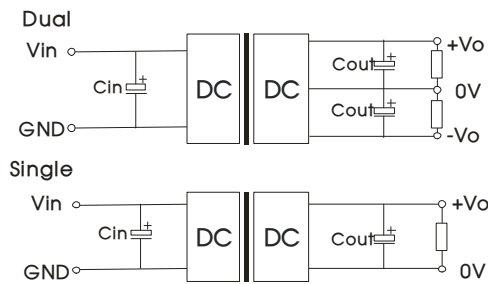


Fig. 2

Vin(VDC)	Cin	Cout
5	100μF/16V	Vo(3/±3/5/±5/9/±9):10μF/16V Vo(12/±12/15/±15V):10μF/25V Vo(24/±24V):10μF/50V
12	100μF/25V	
24	10μF/50V ~47μF/50V	
48	10μF/100V ~47μF/100V	

3. EMC compliance circuit

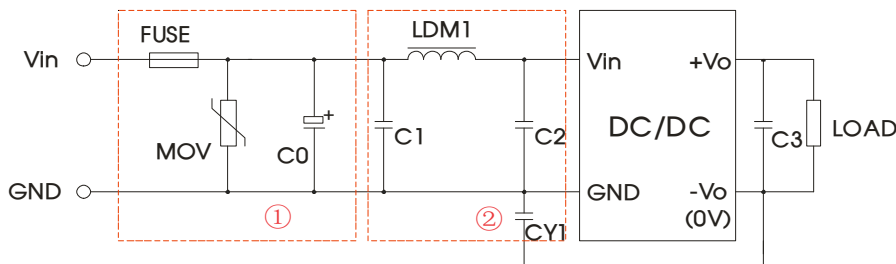


Fig. 3

Parameter description:

Model	Vin:5VDC	Vin:12VDC	Vin:24VDC	Vin:48VDC
FUSE	Choose according to actual input current			
MOV	--	S14K20	S20K30	S14K60
C0	1000μF/16V	1000μF/25V	330μF/50V	330μF/100V
C1	4.7μF/50V			4.7μF/100V
LDM1	12μH			
C2	4.7μF/50V			4.7μF/100V
C3	Refer to the Cout in Fig.2			
CY1	1nF/2kV			

Notes:

- ① For EMC tests we use Part ① in Fig. 3 for Immunity and Part ② for Emissions test. Selecting based on needs.
- ② If there is no recommended parameters, the model no require the external component.

4. Input current

When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module(see Fig. 4).

Generally: Vin=5V Iave=1297mA
 Vin=12V Iave=648mA
 Vin=24V Iave=307mA
 Vin=48V Iave=158mA



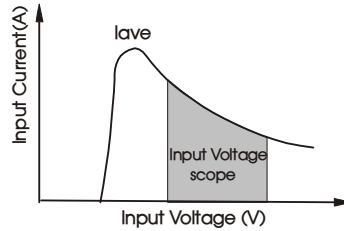


Fig. 4

5. For more information please find DC-DC converter application notes on www.mornsun-power.com

Dimensions and Recommended Layout

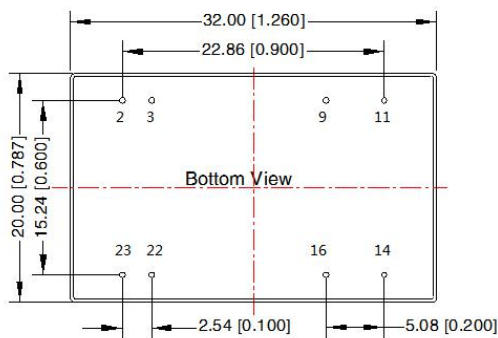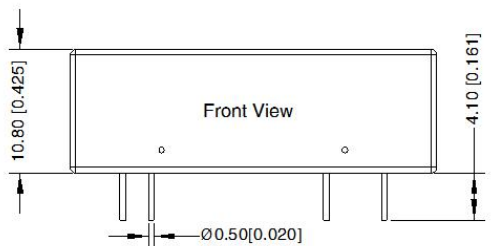


Note:
 Unit: mm[inch]
 Pin diameter tolerances: $\pm 0.10 [\pm 0.004]$
 General tolerances: $\pm 0.50 [\pm 0.020]$


THIRD ANGLE PROJECTION

Ø1.00 [Ø0.039]

Dual

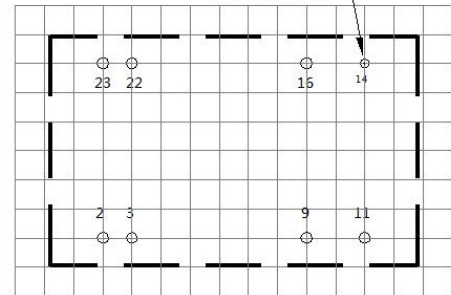

Single

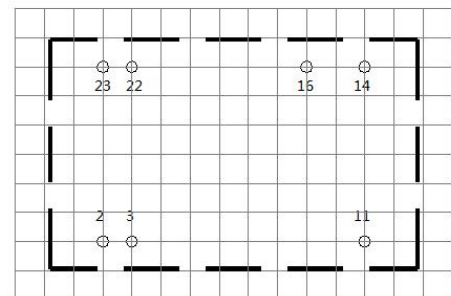

Note: Grid 2.54*2.54mm

Pin-Out		
Pin	Single	Dual
2,3	GND	GND
9*	No Pin	0V
11	NC	-Vo
14	+Vo	+Vo
16	0V	0V
22,23	Vin	Vin

* Note: 5V input product without 9th pin
 NC: Pin to be isolated from circuit

Notes:

1. For additional information on Product Packaging please refer to www.mornsun-power.com. Packaging bag number: 58210008;
2. Recommend to use module with more than 5% load, if not, the ripple of the product may exceeds the specification, but does not affect the reliability of the product;
3. The recommended unbalance degree of the dual output module load is $\leq \pm 5\%$; if the degree exceeds $\pm 5\%$, than the product performance cannot be guaranteed to comply with all parameters in the datasheet. Please contact our technicians directly for specific information;
4. The maximum capacitive load offered were tested at nominal input voltage and full load;
5. Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity $<75\%$ RH with nominal input voltage and rated output load;
6. All index testing methods in this datasheet are based on our Company's corporate standards;
7. The performance parameters of the product models listed in this manual are as above, but some parameters of non-standard model products may exceed the requirements mentioned above. Please contact our technicians directly for specific information;
8. We can provide product customization service, please contact our technicians directly for specific information;
9. Specifications are subject to change without prior notice.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 8, Nanyun 4th Road, Huangpu District, Guangzhou, China
Tel: 86-20-38601850

Fax: 86-20-38601272

E-mail: info@mornsun.cn

www.mornsun-power.com