


The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of this information in any format or manner. CONNELY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

1 2 3 4 5 6 7 8

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/07/10'		LJC 09/07/10'
B	DRAWING UPDATE	JLZ 08/30/19'		

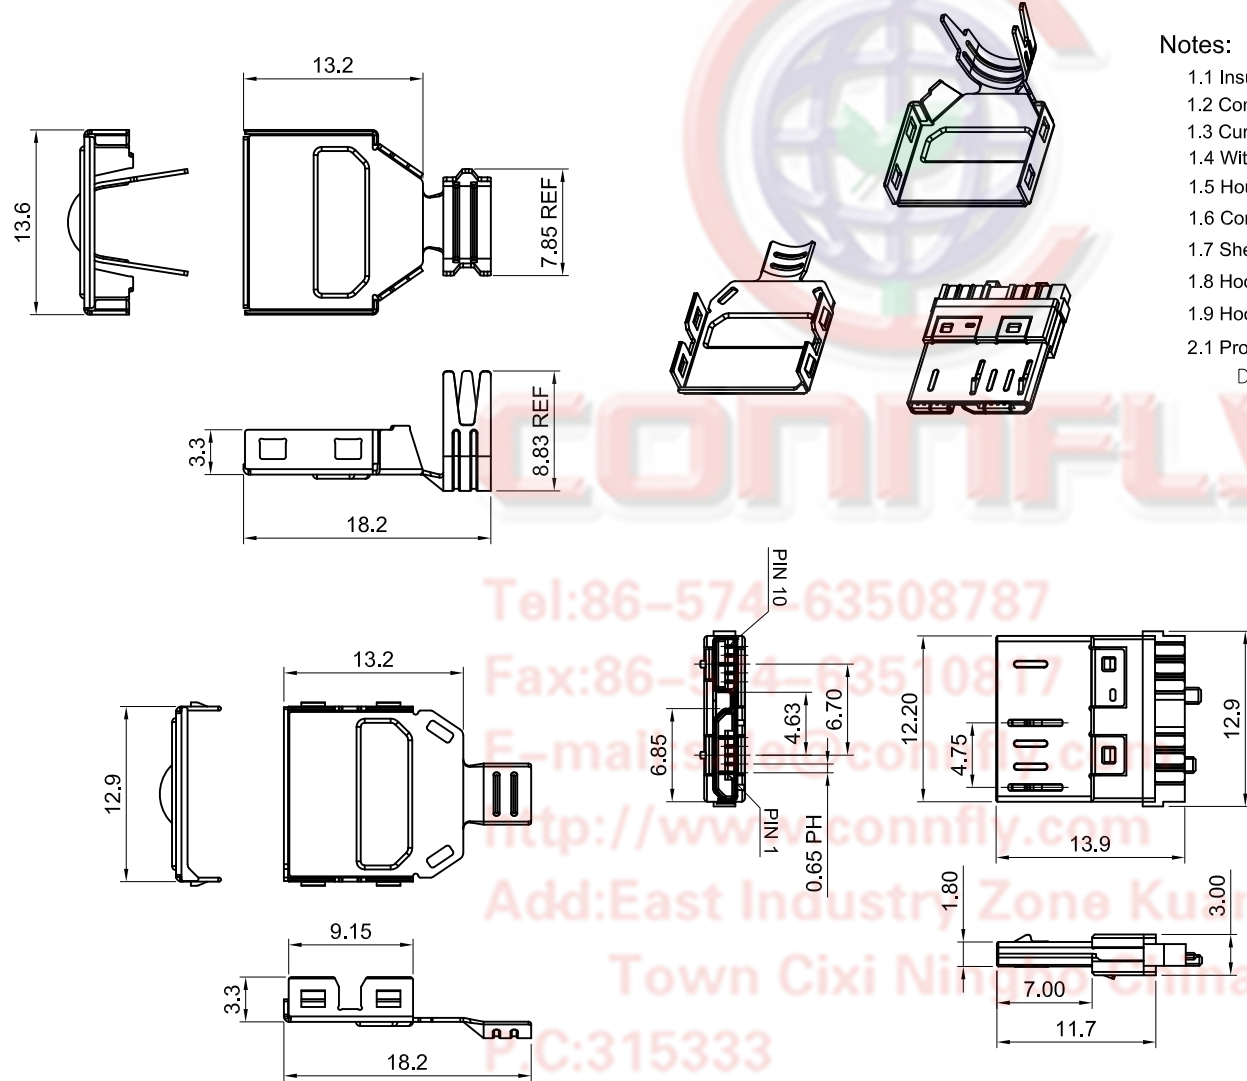

Notes:

- 1.1 Insulation Resistance:100MΩ Min.
- 1.2 Contact Resistance:50mΩ Max.
- 1.3 Current Rating:1.0A at 30V AC.
- 1.4 Withstanding Voltage:100V AC for one minute.
- 1.5 Housing: Thermoplastic (UL 94-0).
- 1.6 Contact: Copper Alloy.
- 1.7 Shell: Stainless Steel.
- 1.8 Hood: Steel.
- 1.9 Hook: Stainless Steel.
- 2.1 Product Number Code:

DS1105-02 - X X X

- Contact plated
- 0: Selective Gold Flash
- C: 3u" Gold
- 3: 30u" Gold
- Shell plated
- N: Nickel
- Color of housing
- B: Black

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	Micro USB 3.0 Male
UNITS	mm		10P Solder Type
SHEET SIZE	A4	SERIES	DS1105-02 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1105-02-XXX-B		

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD

1 2 3 4 5 6 7 8