
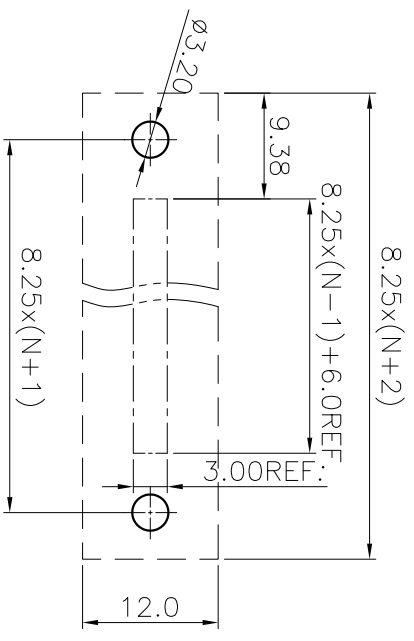
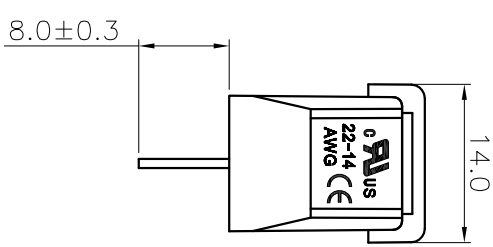
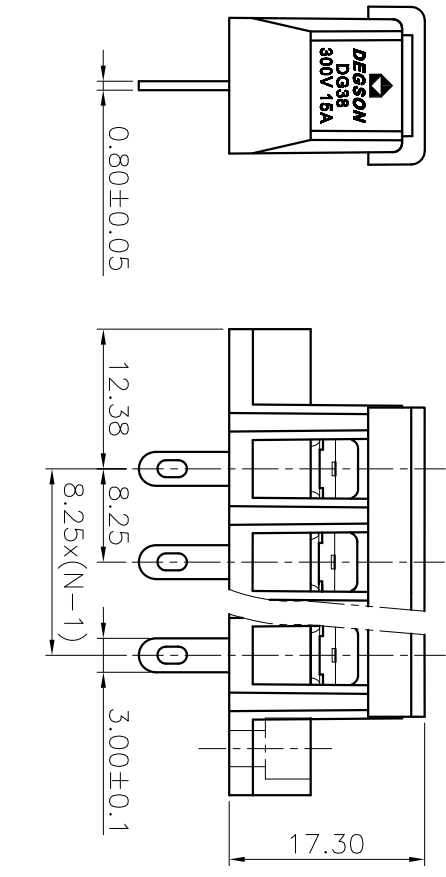


(W/O COVER)

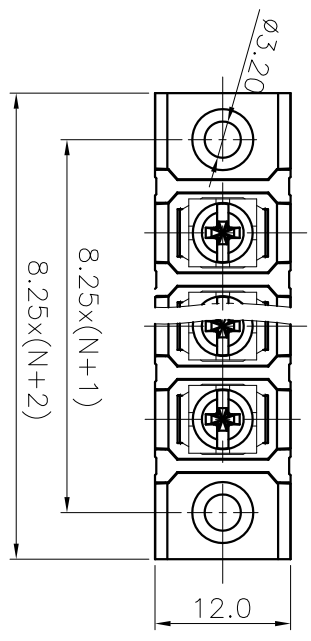


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

- NOTES1:  
UL Standard  
1. Rated voltage/current : 300V / 15A  
2. Torque value : M3 , 4.43lb.in  
3. Wire range : 22~14AWG

- NOTES2:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 8.25mm, Poles : N=02~24P  
3. Withstanding voltage : AC1600V/1min  
4. Operating temperature: -40°C~+105°C  
5. Undimensioned tolerances:

Pitch range	in	mm	Nominal dimension	range	Over	Under
6	10	30	60	100	150	0.1/0
TO	TO	TO	TO	TO	TO	<
10	24	30	60	100	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00 ±1.30 ±2°

6. RoHS Compliance

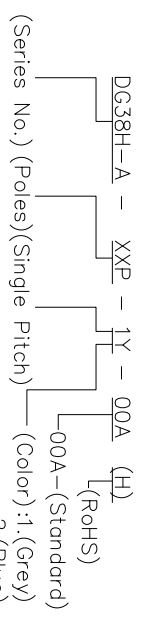

- (Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)  
2. (Blue)  
3. (Black)  
4. (Green)  
5. (Orange)  
6. (Red)  
7. (Transparent)  
8. (Yellow)  
9. (White)

DETACHED LISTS		PART NO. : /		NAME : <b>DEGSON</b> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
APPD. : /	CHKD. : /	TITLE : CUSTOMER DRAWING			
DRFT. : /	DRAWING NO. : /		REV	DO	SHEET
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SCALE	1:1

A 8 7 6 5 4 3 2 1