




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification

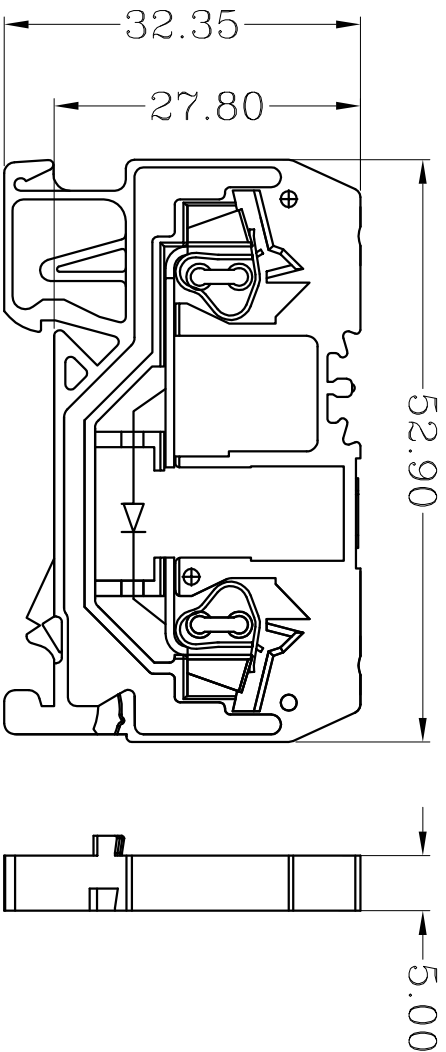

IEC 额定数据/IEC Rated data

接线范围/Wire range	0.2-2.5mm ²
单股导线/Solid	0.2-2.5mm ²
软导线/Stranded	0.2-2.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.5mm ²
剥线长度/Strip length	8-9mm
额定电压/Rated voltage	250V
额定电流/Rated current	0.5A
反向电压/Reverse voltage	1000V
其他信息/Other information	
塑料/ Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin
阻燃等级/Flame retardant rating	V0
使用环境温度/Usage ambient temperature	-25°C - +70°C
储存及运输环境温度/Storage ambient temperature	-40°C - +85°C
导轨尺寸/Rails Size	SP35X7.5/SP35X15
认证/Approval	_____

订货信息 Order Info

订货号 PART NUMBER	颜色 COLOR	未标注公差参照GB/T14486														
225929	灰色 Gray	基本尺寸 公差	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
			±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46

		Rev	Name
单位/Unit	mm	01	225929 1X1通道二极管端子 225929 1X1 channel diode terminal