


Push-in terminal block - UJ6-2.5/3-3-421755



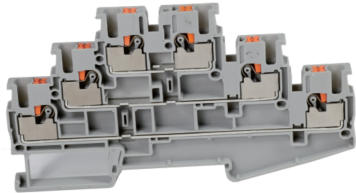

Push-in terminal block , rated voltage:800V , Max. operating current:24A, connection method : spring connection , number of connections : 6 , crimping range : 0.2mm² -4mm² , AWG : 26-12 , thickness:5.2mm , height: 56.5mm , color : grey , mounting type : TH35-7.5、 TH35-15

Product parameter

| Parameter | Data |
|---------------------------------------|--------------------|
| Packing unit (PCS) | 55 |
| NW per piece(g) | 29.2 |
| Layers | 3 |
| Number of connections | 6 |
| Rated cross section(mm ²) | 2.5 |
| Color | grey |
| Insulation material | PA |
| Flame retardant grade | V0 |
| Rated voltage(V) | 800 |
| Rated current(A) | 24 |
| Temperature of insulation material | -40 ~ +125 |
| Wire feed | Above the terminal |

Product certification

| Parameter | Data |
|--------------------|--------------------------------------------------------------------------------------|
| Certification logo |  |
| Certification logo |  |
| Certification logo | |

| Parameter | Data |
|-----------|-------------|
| | RoHS |

Technical data

| Parameter | Data |
|-----------------------------------------------------|-------------------|
| Connection Method | Spring connection |
| Stripping length(mm) | 11 |
| Solid conductors(mm ²) | 0.2-4 |
| Solid conductors AWG | 26-12 |
| Stranded conductors(mm ²) | 0.2-2.5 |
| Stranded conductors AWG | 26-12 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Operating temperature () | -40 ~ +105 |
| Ambient temperature (storage/transportation) () | -25 ~ +55 |
| Relative humidity | 30% ~ 90% |

Dimension

| Parameter | Data |
|---------------|-------|
| Width(mm) | 102.5 |
| Thickness(mm) | 5.2 |
| Height(mm) | 56.5 |

Business data

| Parameter | Data |
|-----------------------------------------------------|-------|
| End cover- UJ6-2.5/3-3G - 422161-Packing unit (PCS) | / |
| End cover - UJ6-2.5/3-3G - 422161-NW per piece(g) | 4.9 |
| End cover - UJ6-2.5/3-3G - 422161-Width(mm) | 102.2 |
| End cover- UJ6-2.5/3-3G - 422161-Thickness(mm) | 2.2 |
| End cover- UJ6-2.5/3-3G - 422161-Height(mm) | 50.5 |