



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE

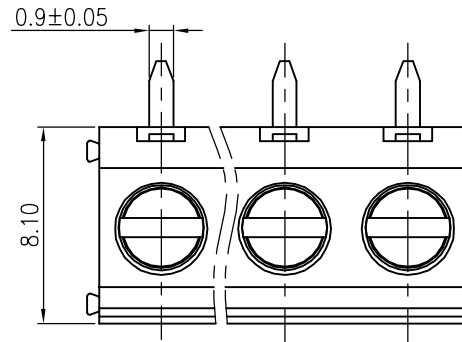

- Notes:
1. Pitch: 5.08mm , Poles: 2-XXP
 2. Rated voltage/current: UL 300V/12A
VDE 250V/15A
 3. Operation temperatures: -40°C ~ +105°C
 4. Withstanding Voltage: AC2000V/1min
 5. Insulation Resistance: 5000MΩ / DC1000V
 6. Wire Range: 26~14AWG, 1.5mm²
 7. Max. Torque Value: M2. 5, 4. 08kgf. cm
 8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						—
to	over	over	to	over	over	over	—	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150	∩ □	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0 0.05/10	

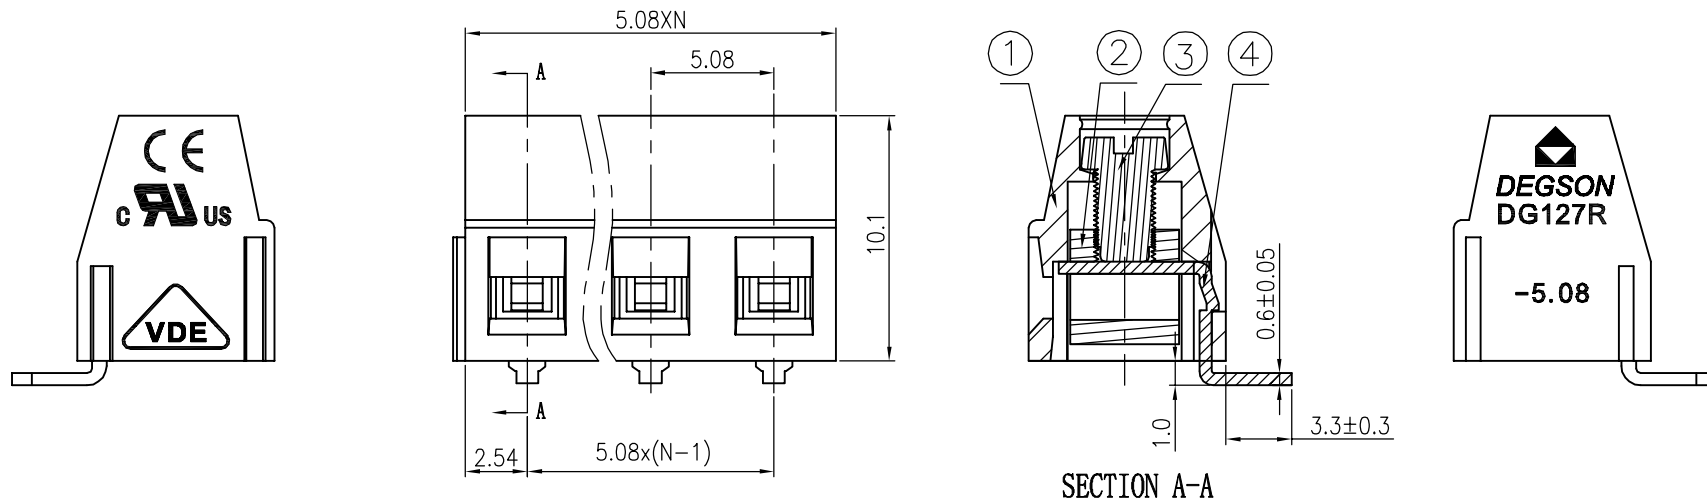

4	DG127R Pin header	4028B00020 (H)	XX	Brass	SnCe
3	DG127 "—" Screws (M2. 5*3. 8)	S000001450 (H)	XX	Steel	Cr ³⁺ Zn
2	DG127 Brass cage	X000000170 (H)	XX	Brass	Ni plated

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG127-5.08 Housing	4095A0YXXA (H)	1	PA66	UL94V-0

DFTO L/JH DATE 09/12/08* CHKD DATE MFO DATE APPVL DATE	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
TOLERANCES EXCEPT AS NOTED MM .0 ± ± .00 ± ± .000 ± ±	NAME DG127R-5.08-XXP-1Y-00A(H)
ANGLES ± 1° G.E : FINISH : SCALE : 1:1	DRAWING NO. DG127R-5.08-E01 /PART NO. DO NOT SCALE DRAWING
THIRD ANGLE PROJECTION	SIZE A3 REV TO 09/12/08* SHEET 1 OF 1