

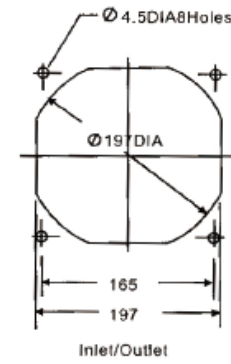



尺寸 Size: 200mmx200mmx60mm
 风量 Airflow: 780-890m³/hr
 350-530CFM
 重量 Weight: 1480g
 噪音 Noise: 60-65dBA
 风叶 Impeller Material: PBT Thermoplastic Black, UL94-V0
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: AWG#24 UL 1332(Optional)
 马达 Motor: Capacitor-Run Induction Motor
 温度范围 Operating Temperature: -10°C~+65°C

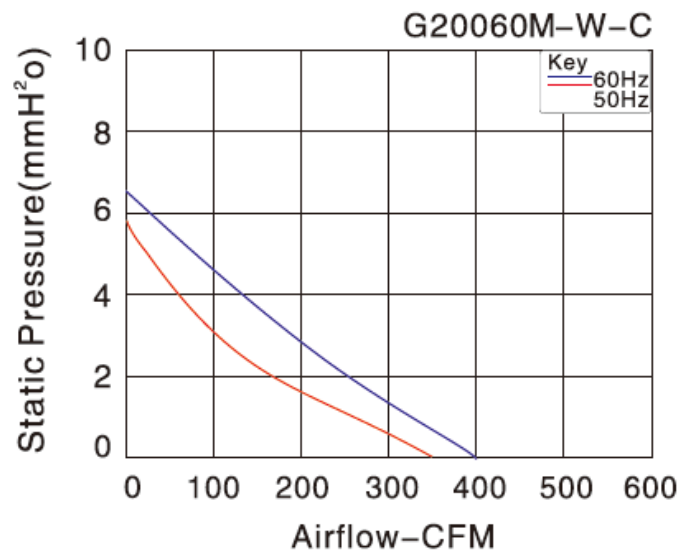

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G20060HA,B-W-C	Ball	100/125	50/60	0.4	60	2600/3050	60/65	780/890	460/530	1	3.3uF/250V
G20060HA ₂ ,B-W-C	Ball	200/240	50/60	0.25	55	2600/3050	60/65	780/890	460/530	1	1.5uF/500V
G20060HA ₃ ,B-W	Ball	380/420	50/60	0.2	60	2600/3050	60/65	780/890	460/530	3	—
G20060HA ₂ ,B-W-C	Ball	380/420	50/60	0.2	60	2600/3050	60/65	780/890	460/530	1	1uF/500V
G20060MA,B-W-C	Ball	100/125	50/60	0.6	60	2100/3050	60/65	594/679	350/400	3	3.3uF/250V
G20060MA ₂ ,B-W-C	Ball	200/240	50/60	0.25	42	2100/3050	60/65	594/679	350/400	1	1uF/500V

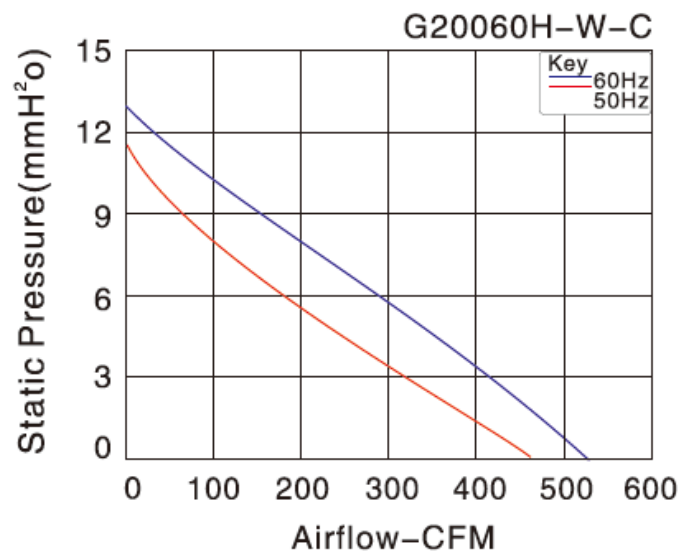

Fan Accessories

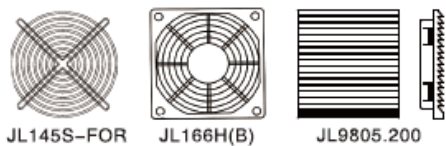

JIULONG MOTOR
AC DC FANS COOLING FANS



UL
E248719



34

Http://www.xtgygs.cn
 如需特殊电压也可根据需求提供，本公司保留技术变动权利。
 Special voltage may be provided if necessary according to the inquiry, All technical modification rights reserved.