



Rev.	Description	Date
A0	New release	2022.10.12

1. PHYSICAL CHARACTERISTICS (mm)

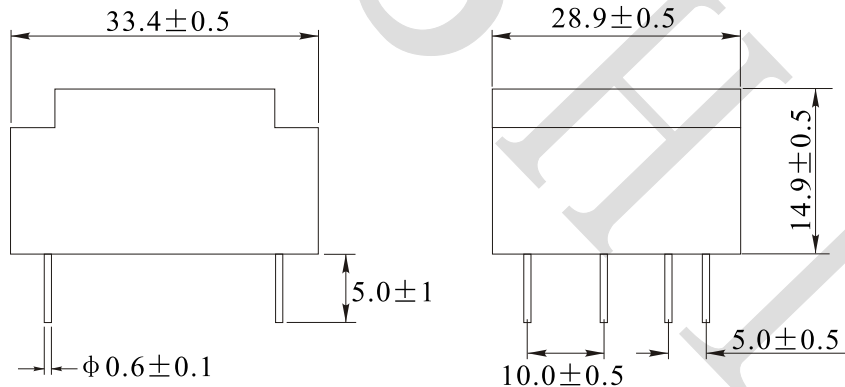


Bottom view

Top marking

1	■	SHINHOM AC230V 50/60Hz UI210019 ta: 70°C 1VA 21V,47mA	8
3	■		7

2. ELECTRONICAL SCHEMATIC

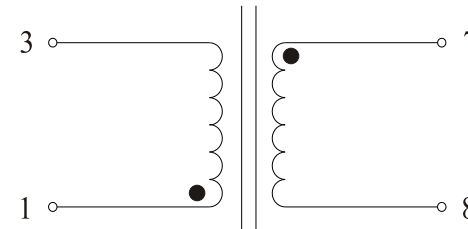

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V,50Hz-60Hz

Sec load voltage: 21.0V±0.5V@47mA

Noload voltage: 34.0V±0.5V

Output Power: 1.0VA

Hi-Pot: 4000V,50Hz,1mA,10S Pri to Sec

Note:

- Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: >28%

NOTES:

Temp 20°C 48%RH
RoHS Compliant

NAME:	Power Transformer		
CUSTOMER P/N:	BV UI210019	DATE:	2022-10-12
SHINHOM P/N:	UI210019	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	



SHINHOM
SHAANXISHINHOM ENTERPRISE CO LTD

The Document property belong to SHINHOM & is not allowed to be duplicated without authorization