


REV	2		1	
	CONTENT		CHK	DATE
V0.0	CONTENT		MYZ	21.05.21

Electrical :


- | | | |
|--|---------------|------------------------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 250V |
| 2.Rated Current : | 8A | 5A |
| 3.Wire Range: | 28-16AWG | 0.5-1.5mm ² |
| 4.Stripping Length : | 7-8mm | |
| 5.Withstanding Voltage : | AC1600V/1Min. | |
| 6.Operating Temperature : | -40°C~+105°C | |
| 7.RoHS Compliance | | |
| 8.Safty Approval : | cULus CE | |
| 9."★" is the key quality control point | | |

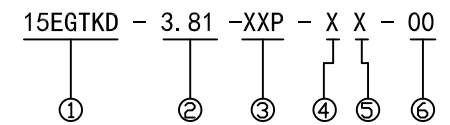

- | | |
|---|--|
| ① Sereies NO. | ④ 1 Single Pitch
2 Double Pitch |
| ② Pitch | ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White |
| ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts | ⑥ Customer Request: 00-- Standard |

5	Button	XXXXXX	P	POM	UL94HB
4	Spring	XXXXXX	P	Srainless steel	
3	Clamp	XXXXXX	P	Phosphor bronze	Tin Plated
2	Housing	XXXXXX	1	PA66	UL94V-0
1	Cover	XXXXXX	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	MYZ	DATE	21.05.21	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE				
				NAME	15EGTKD-3.81-XXP-XX-00
				DWGNO.	XXXX

Golten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

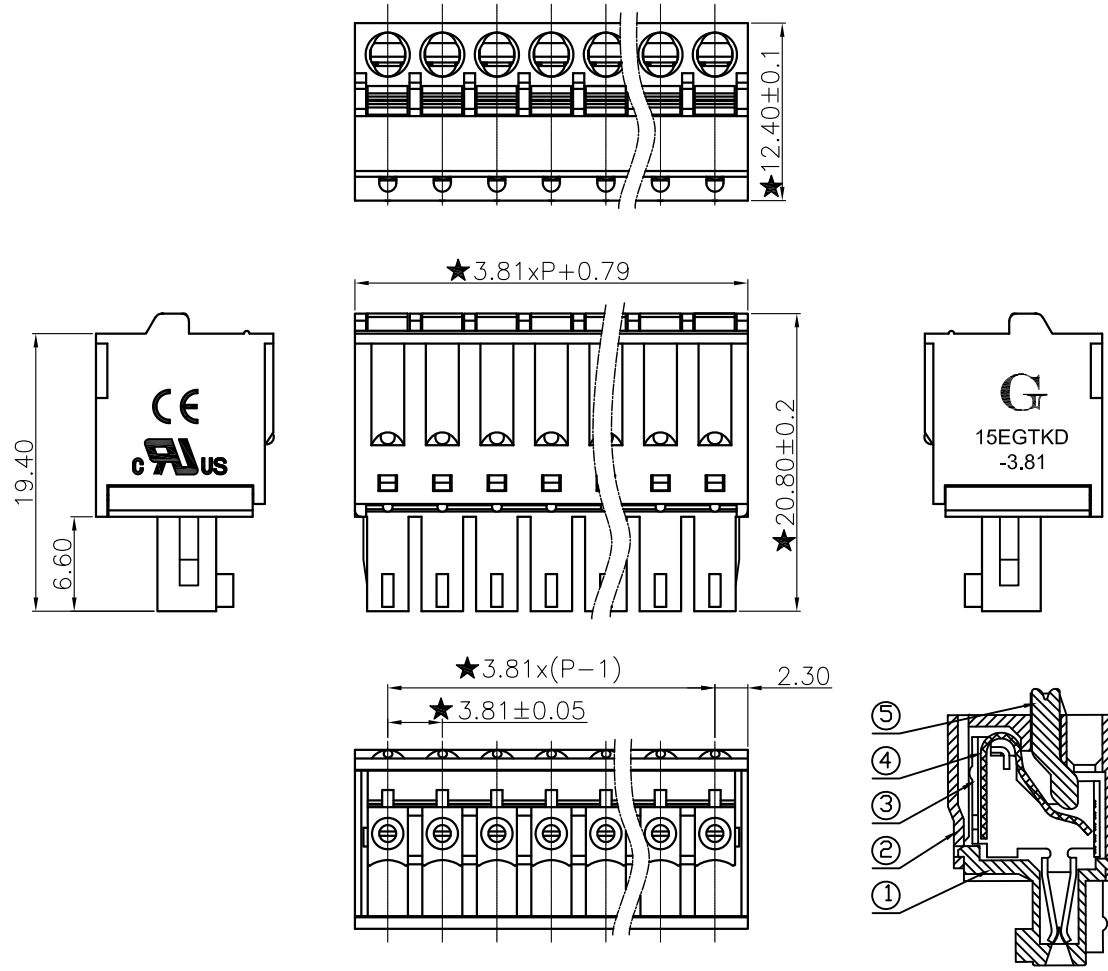

A	Total Pitch Tolerances									Nominal dimension range										$\perp$		$\equiv$	--- //			
	in mm									in mm																
	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over			0	100	over	
	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	10	all	to	to	150		
	30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10				100	150		
	± 0.18	± 0.20	± 0.25	± 0.3	± 0.35	± 0.44	± 0.60	± 0.70	± 0.85	± 0.20	± 0.25	± 0.30	± 0.35	± 0.44	± 0.55	± 0.70	± 0.80	± 0.90	0.2	0.3	0.3	0.2	0.3	0.5		