

Наконечники неизолированные кольцевые НК



Материал

Корпус наконечника: медь
Покрытие: лужное




Сечение провода: 35–50 мм² (AWG 1/0)

Артикул	Номер болта по американской системе	Размеры (мм)						
		d2	B	L	F	E	Dφ	dφ
101871	1/4	6,4	22,0	49,7	20,7	18,0	15,4	11,4
101872	5/16	8,4						
101873	3/8	10,5						
101874	7/16	11,5						
101875	1/2	13,0						
101876	9/16	15,0						
101877	5/8	17,0	32,0	57,5	23,5	18,0	15,4	11,4
101878	11/16	19,0						
101879	3/4	21,0						
101880	7/8	23,0						

Сечение провода: 50–70 мм² (AWG 2/0)

Артикул	Номер болта по американской системе	Размеры (мм)						
		d2	B	L	F	E	Dφ	dφ
101881	1/4	6,4	24,0	51,0	20,0	19,0	17,5	13,3
101882	5/16	8,4						
101883	3/8	10,5						
101884	7/16	11,5						
101885	1/2	13,0						
101886	9/16	15,0						
101887	5/8	17,0	32,0	61,0	26,0	19,0	17,5	13,3
101888	11/16	19,0						
101889	3/4	21,0						
101890	7/8	23,0						

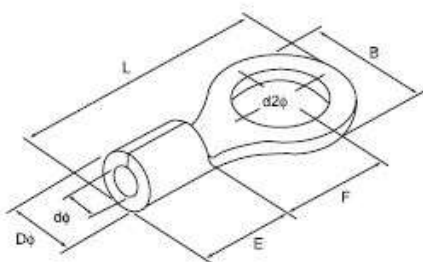

Сечение провода: 70–95 мм² (AWG 3/0)

Артикул	Номер болта по американской системе	Размеры (мм)						
		d2	B	L	F	E	Dφ	dφ
101891	1/4	6,4	27,0	54,2	20,7	20,0	19,5	14,5
101892	5/16	8,4						
101893	3/8	10,5						
101894	7/16	11,5						
101895	1/2	13,0						
101896	9/16	15,0						
101897	5/8	17,0	32,0	68,0	32,0	20,0	19,5	14,5
101898	11/16	19,0						
101899	3/4	21,0						
101900	7/8	23,0						

Сечение провода: 95–120 мм² (AWG 4/0)

Артикул	Номер болта по американской системе	Размеры (мм)						
		d2	B	L	F	E	Dφ	dφ
101901	1/4	6,4	28,5	55,6	20,4	21,0	22,1	16,4
101902	5/16	8,4						
101903	3/8	10,5						
101904	7/16	11,5						
101905	1/2	13,0						
101906	9/16	15,0						
101907	5/8	17,0	32,0	69,0	32,0	21,0	22,1	16,4
101908	11/16	19,0						
101909	3/4	21,0						
101910	7/8	23,0						