


Category: 穿墙式端子/Plug-in terminal-plug

Product name: 穿墙接线端子 SCWH4

Product Description: 4mm² , 500V , 41A CE



Product Picture

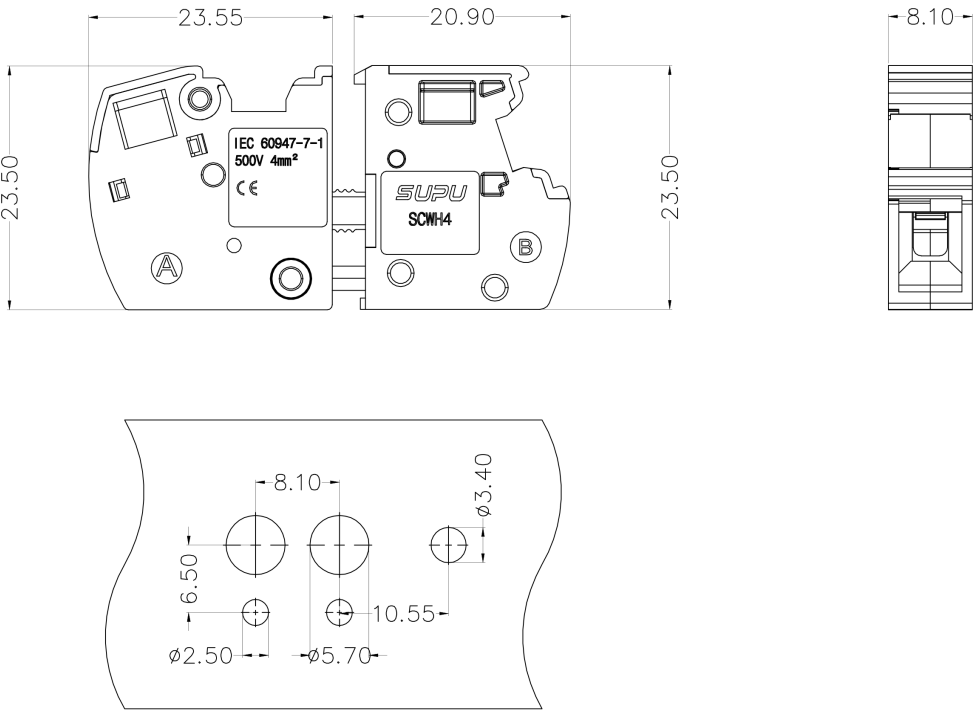

钻孔图

For a drilling diagram

基本信息 /Basic Information

产品型号 SUPU ID	SCWH4
产品层数 Number of levels	1
产品位数 Number of connections	1P
接线方式 Connection method	穿墙螺钉4mm ² 水平接线端子(不带柱子)
防护等级 Protection Level	IP20
工作温度 Work temperature	-40~+105℃

IEC数据 /IEC Data

额定电流 Rated Current	41A		
额定电压 Rated Voltage	500V		
过压类别 Overvoltage category	III	III	II
污染等级 Pollution degree	3	2	2
额定冲击电压 Rated impulse voltage	8.0KV	-	-
额定电压 Rated Voltage	500V	-	-
硬导线截面积 Conductor cross section solid	0.2-6mm ²		
柔性导线截面积 Conductor cross section flexible	0.2-4mm ²		
柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	0.25-4mm ²		
锁线螺钉规格 Locking screw Specification	-		
额定扭矩 Rated Torque	-		
固定螺钉规格 Fixed Screw Specification	-		
额定扭矩 Rated Torque	-		
剥线长度 Stripping length	8-10mm		

UL数据 /UL Data

使用组别 Use group	B	C	D
额定电流 Rated Current	30A	30A	5A
额定电压 Rated Voltage	300V	300V	600V
额定接线容量 Rated cross section		24-10AWG	

材料信息 /Material Data

绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	I
阻燃等级，符合UL94 Flame retardant grade, UL94 compliance	V0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn,Plated

产品认证 /Product Certification

认证图标
Certificate



UL证书号
UL file No.

VDE证书号
VDE No.

TUV证书号
TUV No.

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code