
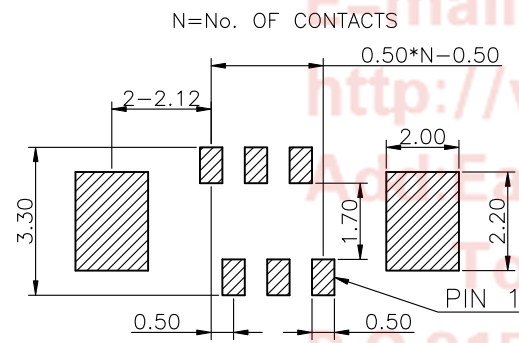
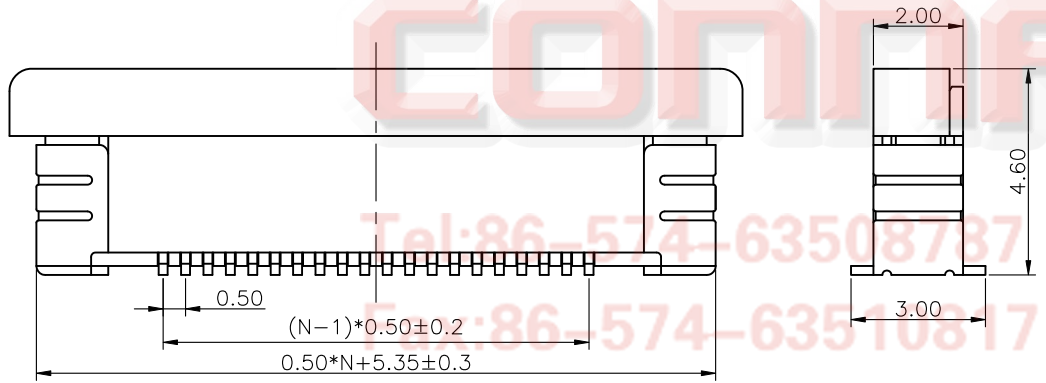


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------------|---------------|
| A | NEW RELEASE | YCH 09/04/08' | ~ | LJC 09/04/08' |
| B | DRAWING UPDATE | JLZ 09/13/17' | HZW 09/13/17' | LJC 09/13/17' |
| C | DRAWING UPDATE | JLZ 11/29/17' | ~ | |

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - TEMPERATURE:-20°C~+85°C.
 - CONTACT RESISTANCE:30mΩ max.
 - INSULATION RESISTANCE:100MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 100V PER MINUTE.
 - CURRENT RATING: 0.5 Amp.
 - VOLTAGE RATING: 50 v.
- PART NUMBER: DS1020-08
- PRODUCT NUMBER CODE:
DS1020-08- X X X X X - X
 - PACKING TYPE
R: TAPE ON REEL
N/A CODE: TUBE
 - BEND TYPE
1: R1 TYPE
 - CONTACT PLATING
T1: TIN
8: FULL GOLD FLASH
 - COVER COLOR
B:BLACK
 - HOUSING COLOR
V:IVORY
 - No. OF CONTACTS
04~39

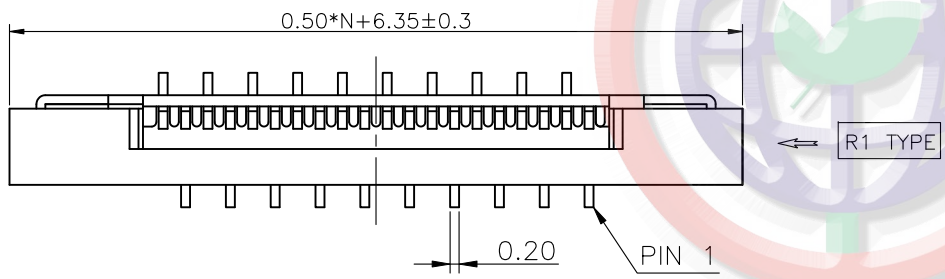

RECOMMEND PCB LAYOUT
(TOLERANCE=±0.05)

| GENERAL TOLERANCE | | ANGLE TOLERANCE | |
|-------------------|-------|-----------------|-----|
| X. | ±0.60 | X. | ±5° |
| .X | ±0.38 | .X | ±3° |
| .XX | ±0.25 | .XX | ±2° |

| | | | |
|--------------|-----------------------|-------|--------|
| DRAWING TYPE | CUSTOMER | | |
| SCALE | 1:1 | SHEET | 1 OF 1 |
| DRAWING NO. | C-DS1020-08-XXXXX-X-C | | |

| | | | |
|------------|----|--------|----------------------|
| PROJECTION | | TITLE | 0.50mm FPC CONNECTOR |
| UNITS | mm | | ZIF V/T SMT TYPE |
| SHEET SIZE | A4 | SERIES | DS1020-08 SERIES |

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-63508737
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Address: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315333