





FEMALE Housing



FEMALE TERMINAL

Wire Range		O.D of Wire
Section Area (mm <sup>2</sup> )	AWG#	mm
0.09~0.3	28~22	1.2~1.6

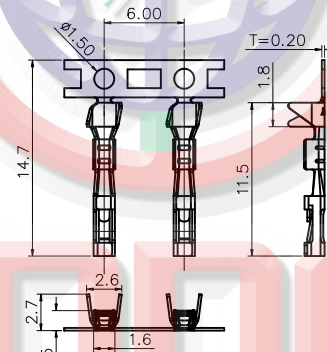

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/28/05'		LJC 06/28/05'
B	UPDATE DRAWING	JLZ 03/03/16'	HZW 03/03/16'	LJC 03/03/16'

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Wire range: AWG#28~#22
- . Rated voltage: 250V
- . Rated current: 3A
- . Contact resistance: ≤ 30mΩ
- . Insulation resistance: ≥ 1000MΩ
- . Withstanding voltage: 500V, AC 1 minute
- . Temperature range: -25 ~ +85°C
- . Recommend PC board thickness: 1.6mm

2. PRODUCT NUMBER CODE:

Position	DIMENSION	
	A	B
1	-	2.54
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10

I - DS1071 - S C X 0 XX  
 (For Female Housing Only)

— Housing Number  
 1\*1~1\*40  
 2\*2~2\*40

— Housing Color  
 B: Black

---


T - DS1071 - S C X 0 0  
 (For Female Terminal Only)

— Contact Plating  
 6: Tin  
 8: Full gold flash


---

MALE PRODUCT NUMBER CODE  
 SEE DS1021&DS1022

MALE V/T TYPE

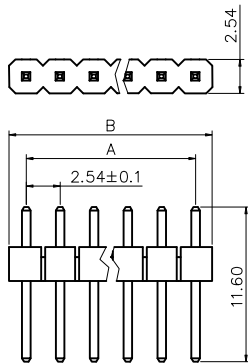

MALE R/A TYPE

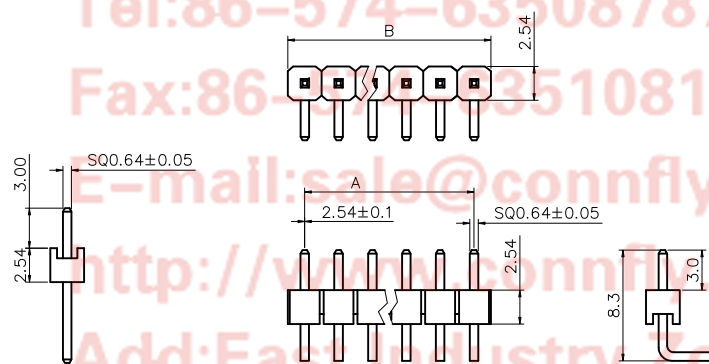

Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION		TITLE	P.C.B CONNECTOR 2.54mm TJC8 TYPE	
UNITS	mm	SHEET	A4	
SHEET SIZE	A4	SERIES	DS1071 SERIES	

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1071-XXXXX-B		

晨翔电子有限公司  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**