





REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 10/10/14'		

Notes:

1. Material:
  - 1.1. Housing: High Temperature LCP UL 94V-0 Color of Black.
  - 1.2. Contacts: Copper Alloy,
  - 1.3. Shell: Stainless Steel.
2. Finish:
  - 2.1. Contact Area: Gold Over Nickel
  - 2.2. Solder Area: Matte Tin.
3. Specifications:
  - 3.1. Temperature Rated: -40° C TO +105° C
  - 3.2. Voltage Rating: 30V AC/DC
  - 3.3. Contact Resistance: 50mΩ Max.
  - 3.4. Insulation Resistance: 1000mΩ Min.
  - 3.5. Withstanding Voltage : 500V AC.
  - 3.6. Current Rating: 1.0A.
4. Product Number Code:

DS1138-07 - XX X X X X X X

- Packing Type  
R: Tape On Reel
- Shell Plating  
S: Stainless
- Housing Color  
B: Black
- Contact Plating  
4: Selective 3u" gold
- Mounting Type  
S: SMT type
- Connector Type  
S: Socket
- NO. Of Contacts  
06:6Pin

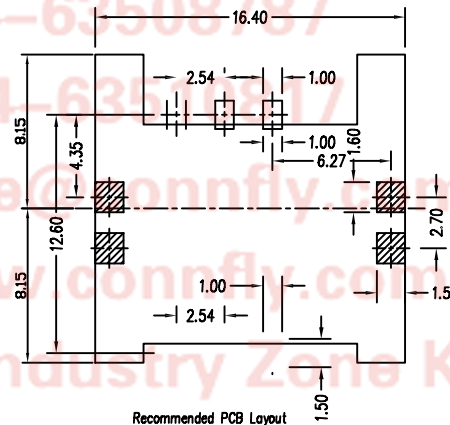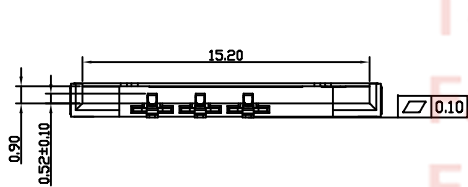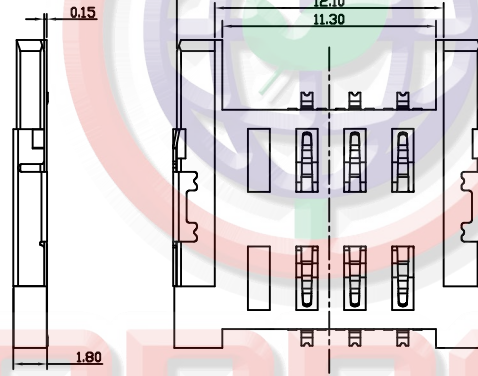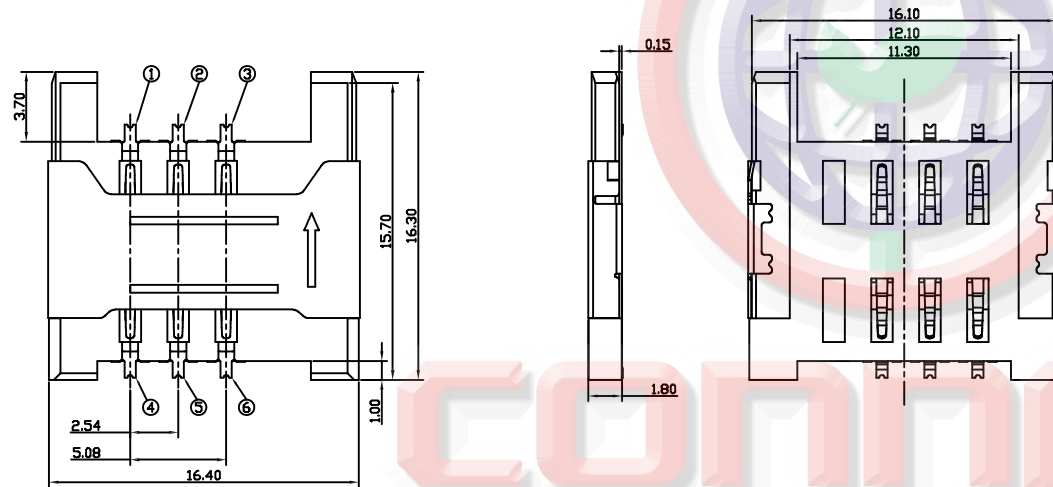

Tel:86-574-63508787  
 Fax:86-574-63508787  
 E-mail:sale@connfly.com  
 http://www.connfly.com  
 Add:East Industry Zone KuangYan  
 Town Cixi Ningbo China  
 P.C:315333

PIN DEFINITION					
1PIN	2PIN	3PIN	4PIN	5PIN	6PIN
VCC	RESET	CLK	GND	VPP	IO

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
	2.54mm Mini SIM Card H=1.8mm 6 Positions
UNITS	mm
SHEET SIZE	A4
SERIES	DS1138-07 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1138-07-XXXXXX-A

**晨翔电子有限公司**  
**CONNFLY® CONNFLY ELECTRONIC CO., LTD**